

**PICKUP
TUCK**
PORTABLE CARGO ORGANIZER

Installation Manual

View an installation video on our website:
www.pickuptuck.com/installation

If you have any questions or concerns, please
call customer service at: **(855) 742-8825**


Component Description

A. Top Panel Assembly


- (B) Top Panel-Driver
- (C) Top Panel-Passenger
- (D) Locking Latch (2 per)
- (E) Support Strut
- (F) Handle
- (G) Height Adjuster-Strut
- (H) Height Adjuster-Top Panel

J. Back Panel/Side Support Assembly

- (K) Back Panel-Driver
- (L) Back Panel-Passenger
- (M) Side Panel-Driver
- (N) Side Panel-Passenger
- (P) Stabilizer Latch (Upper/Lower)
- (R) Retaining Strap (2 Per)
- (S) Height Adjuster-Side Panel (2 Per)

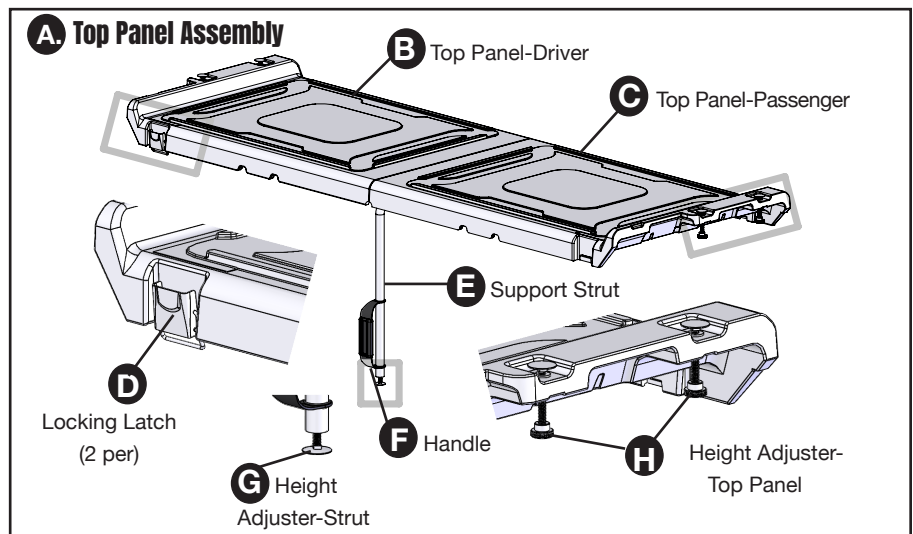

J. Back Panel/Side Support Assembly

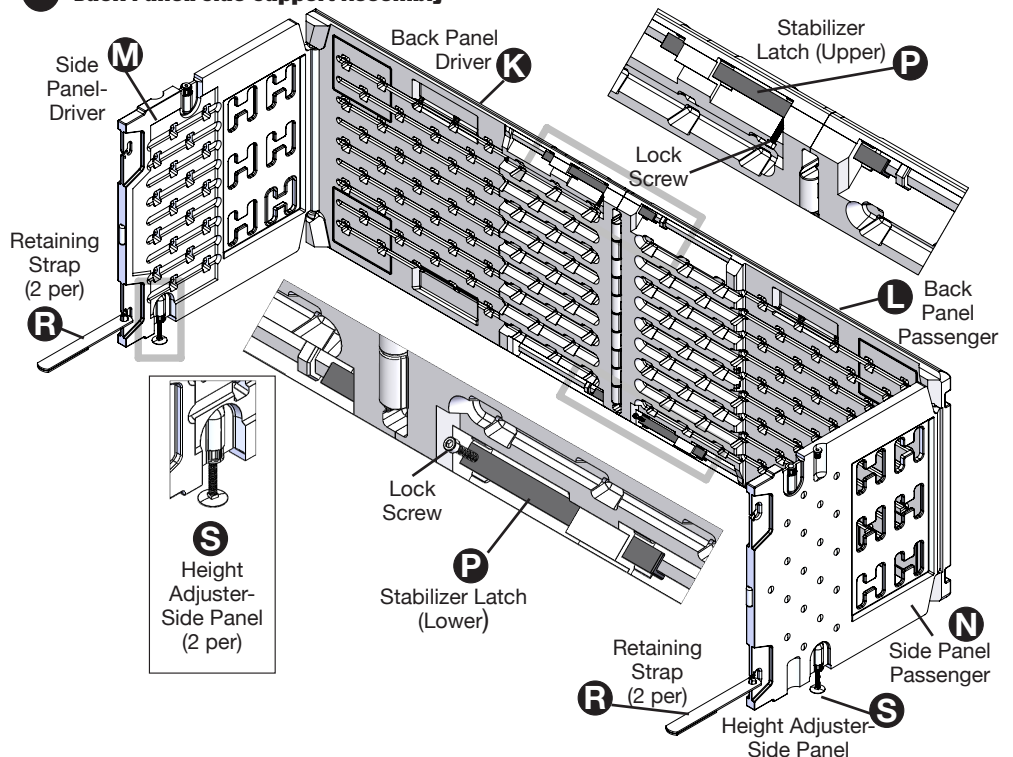

Installation Instructions:

See step-by-step installation video of the following instructions. Please visit PickupTuck.com/Installation to view demonstration. Contact service if you have further questions.




- (1) Unpack Pickup Tuck and position on open tailgate.
- (2) Open Top Panel Locking Latches **(D)**




- (1) Open Top Panel Assembly **(A)**.
- (2) Layout Back Panel/Side Support Assembly **(J)**.



- (1) Open Back Panel/Side Support Assembly **(J)**.
- (2) Notice Retaining Straps **(R)** and Stabilizer Latches **(P)**.

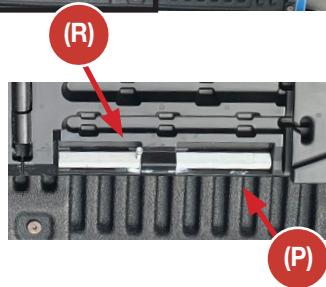

- (1) Slide Upper and Lower Stabilizer Latches **(P)** in towards central hinge until Latches reach stops in panel.

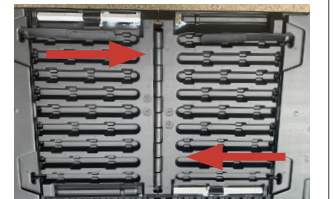


IMPORTANT: Ensure Upper and Lower Stabilizer Latches are securely installed to prevent possible buckling.



- (1) Push Back Panel/Side Support Assembly **(J)** into position in truck bed centered side to side.
- (2) Set Top Panel-Driver **(B)** onto Side Support-Driver **(M)** and over Back Panel-Driver **(K)** as shown.






- (1) Position Top Panel-Passenger **(C)** onto Side Support-Passenger **(N)** and over Back Panel-Passenger **(L)** as shown.
- (2) Push down on center hinge ensuring ends of Top Panel Assembly **(A)** are firmly underneath truck bed sidewall channels.

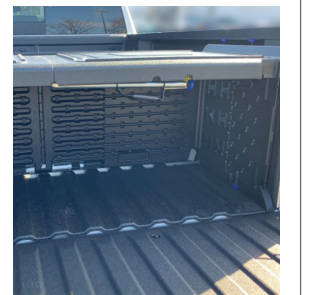




- (1) Swing down Support Strut (E) and center Top Panel Assembly (A) over Back Panel/Side Support Assembly (J).
- (2) Push/engage Support Strut (E) through slot in Back Panel/Side Support Assembly (J).

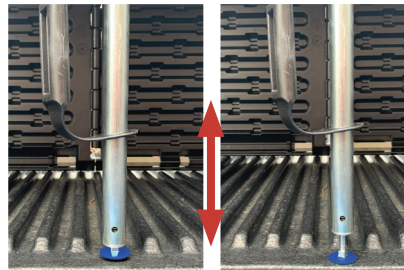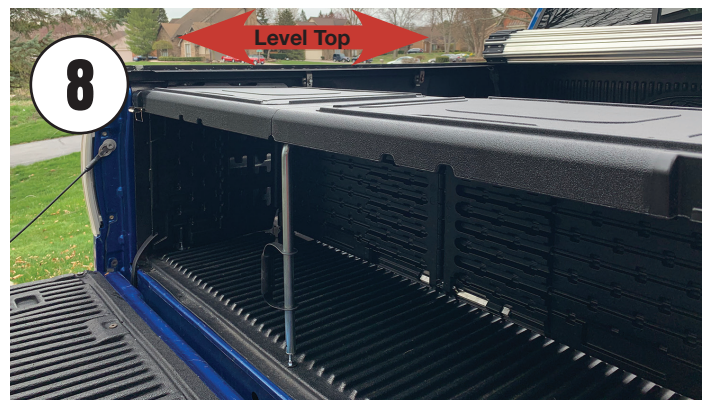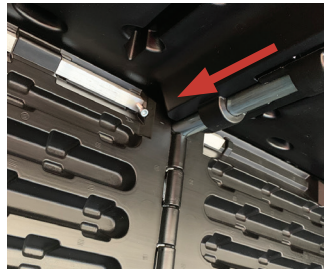


- (1) Adjust Height Adjuster Strut (G) as required to ensure Top Panel Assembly (A) is level fore and aft relative to the truck bed.



- (1) Swing Side Panel– Driver (M) inward to allow access to Height Adjusters– Top Panel (H) as shown. Ensure Height Adjuster– Side Panel (S) is in uppermost position resting on rib of truck bed floor.
- (2) Adjust Height Adjusters– Top Panel (H) upward until snugly engaged underneath truck bed side wall channels.
- (3) Repeat above steps for Passenger Side.

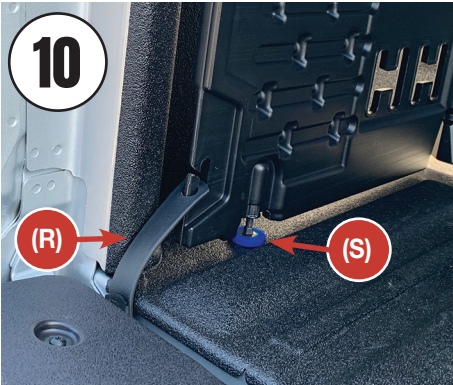

- (1) Swing Side Panel– Driver (M) outward to truck bed side wall as shown. Adjust Height Adjuster – Side Panel (S) ensuring snug fit between truck bed side wall channels and bed floor.
- (2) Route Retaining Strap (R) securely in slot between truck bed floor and tailgate.
- (3) Repeat above steps for Passenger Side.

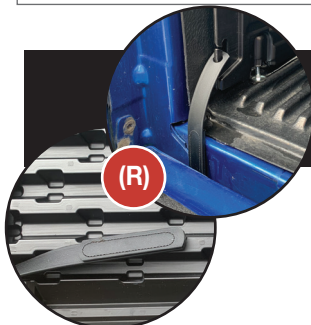


IMPORTANT: Retaining Straps (R) must be securely attached to the Side Panels (M) and (N) and routed between the tailgate/truck bed slot to prevent possible drift toward the truck cab.

See the step-by-step installation video at PickupTuck.com/Installation or contact the Service Department if you have further questions.

INSTALLATION INSTRUCTIONS:

See the step-by-step installation video at www.PickupTuck.com/Installation or contact the Service Department if you have further questions.

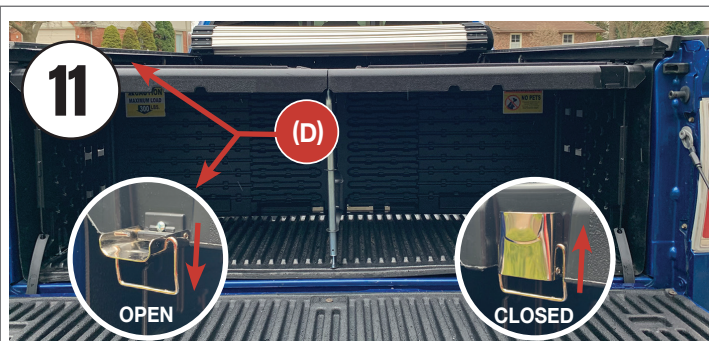

- (1) Ensure Pickup Tuck is seated rearward in truck bed (Top Panel end details are snug against truck bed side-wall channels).
- (2) Flip-up locking latches (D) on top panel in upright position and close the tailgate.



- (1) Check that Top Panel Assembly (A) is flush with tailgate. This will reduce potential for air backflow to push the unit forward to cab.



WARNING:


ADULT ASSEMBLY REQUIRED

- Do not put pets in cargo compartment
- 300 lb. maximum load
- Ensure both upper and lower Stabilizer Latches are securely installed to prevent possible buckling.
- Retaining Straps (R) must be securely attached to the Side Panels (M) and (N) and routed between the tailgate/truck bed slot to prevent possible drift to-ward the truck cab.

LIMITED WARRANTY

TSP Enterprises, LLC warrants to the original purchaser that this product is free of defects in materials or workmanship for one year from the date of purchase (dated sales receipt is required for proof of purchase). At the sole election of TSP Enterprises, LLC, the only remedies available under this warranty will be the replacement of the defective part or replacement of the product. This warranty does not cover abuse, accident, cosmetic issues such as fading or scratches from normal wear or any other cause not arising from defects in material and workmanship.

For warranty service or replacement part information, please contact our Customer Service Department.

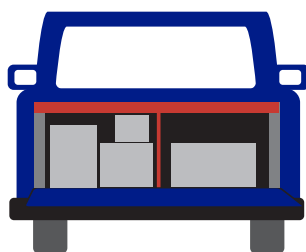

**PICKUP
TUCK**
PORTABLE CARGO ORGANIZER

CUSTOMER SERVICE TOLL-FREE NUMBER:

(855) 742-8825

PO Box 359 • 3930 Bessemer Road,
Coloma, MI 49038

E-mail: info@pickuptuck.com



www.pickuptuck.com

U.S. Patent No.: 10,625,687